Model S4400

Emergency Shower, with Chrome Plated Showerheads

SPECIFICATIONS:

Model S4400 is an emergency shower with chrome plated brass showerheads and a 1" stay-open ball valve with a stainless steel push handle. Compliant to ANSI/ISEA 113-2008.

STANDARD EQUIPMENT:

Showerheads: Chrome plated brass showerheads each with a 2.0 gpm flow regulator.

Valve: 1" NPT rough chrome plated brass stay-open ball valve. Unit is provided with a stainless steel push handle.

Water Supply: 1" NPT female threaded back or side inlet.

Piping & Mounting: Schedule 40 galvanized steel piping and 4-5/8" diameter galvanized floor flanges with a yellow powder coated finish.

Universal Sign: ANSI compliant, vertical identification sign.

Weekly Test Tag: A waterproof test card to record the date and inspector's name for weekly functional testing of the unit.





OPTIONAL ACCESSORIES:

Additional costs may be incurred

o -AL1 Electric alarm with light and horn

o -AL2 Electric alarm with flashing light and horn

o -ET71-2-BVS-OTG Thermostatic mixing valve is ASSE Listed per

the ASSE 1071 standard. The tepid output water complies with ANSI Z358.1 standard. Valve includes Ball Valve Shut-offs, Outlet Temperature

Gauge


o -FLW1 Flow switch, single poleo -SV1 1" stainless steel ball valve

A SAFE-T-TEC

TECHNICAL DIMENSIONS

All dimensions are subject to manufacturer's tolerance of plus or minus 1/2" nominal and subject to change without notice. Acorn Safety® assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. © Acorn Safety®, A Division of Acorn Engineering Company®, Member of Morris Group International™. Please visit www.acorneng.com for most current specifications.

☐ Model S4400 : Emergency Shower

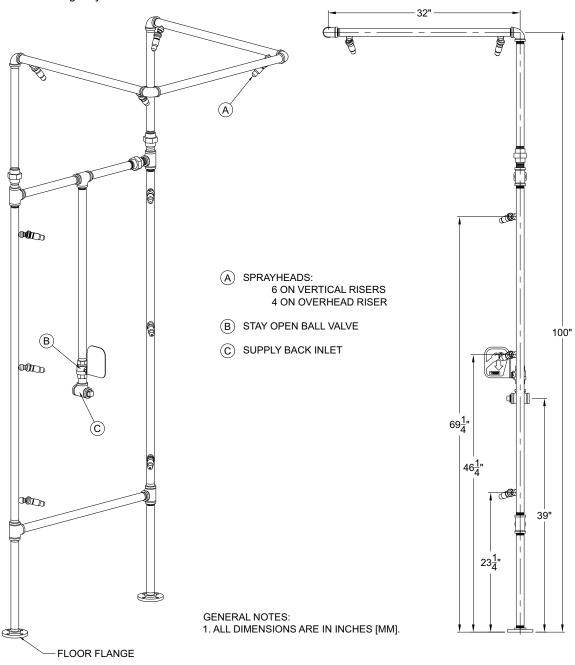

▲ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

\$4400 Date: 01/22/16

Acorn Safety warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Acorn's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Acorn is notified in writing within one year from date of shipment, F.O.B. Industry, California.